

Outdoor Waterproof Station



5040Wh

Capacity

5000Watt

Output Power

7000Watt

Peak Surge Power

2 Version

Version ES Output : 3 units Standard Europe Socket



Version IS Output : 2 units Standard Europe Socket + 1 unit Industrial Socket



Brand packaging




W5 Power Station




AC Charging Cable



Anderson port to MC4 port Cable

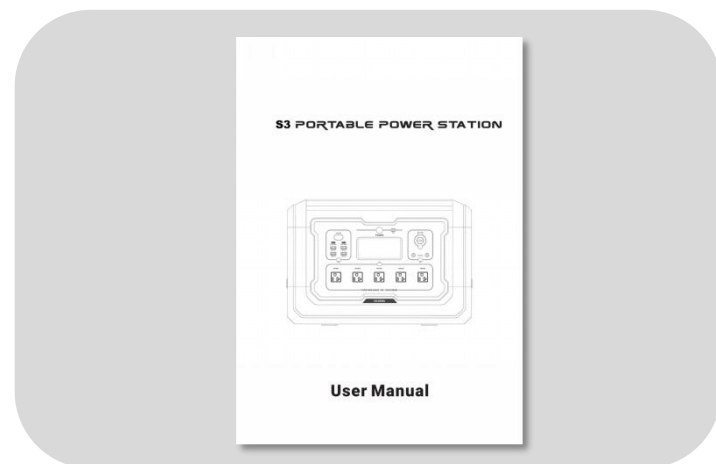

Manual

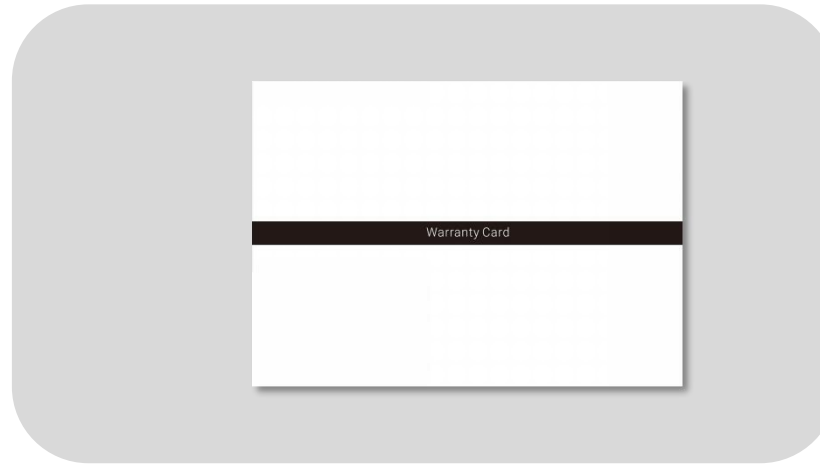

Warranty Card

W5-E



Version ES



Version IS



• Capacity

5040Wh (48V ; 105Ah)

AC Output

220~240V/5000W (Rated) ; 7000W (Peak)

USB-A output

5V/3A; 9V/1.8A; 12V/1.5A (18W Max)

USB-C output

5V/3A; 7V/2.4A; 9V/1.8A; 12V/1.5A

AC Charge Input

200~240Va.c 16A Max 2500W Max

PV(Anderson) Input

12~150Vd.c 15A Max 2100W Max

Waveform

Sine Wave

Size

33.6*20.2*19.8in (852.5*512*502mm)

Net Weight

150.57lb (68.3kg)



LCD Screen

Main Power

Extra Battery Port

USB-A:
5V/3A; 9V/1.8A; 12V/1.5A (18W Max)
USB-C:
5V/3A; 7V/2.4A; 9V/1.8A; 12V/1.5A

AC Output Power On/Off Switch

5000W AC Output Port*3 16A Max

Overload Protection

Ground Terminal

BRAND

Fast charge & slow charge switch
Slow Charging: 1250W
Fast Charging: 2500W

AC Charge Input

PV(Anderson) Input


Overload Protection
(AC IN/OUT Protection)



AC Output

PURE SINE WAVE CURRENT


Pure sine wave -- No damage to electrical appliances

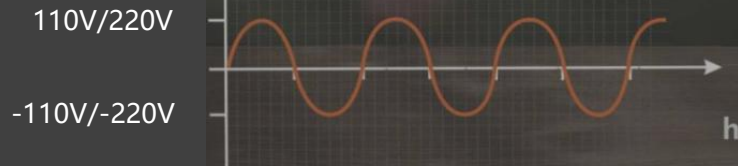

Correction Wave -- damager to electrical appliances




PV Input

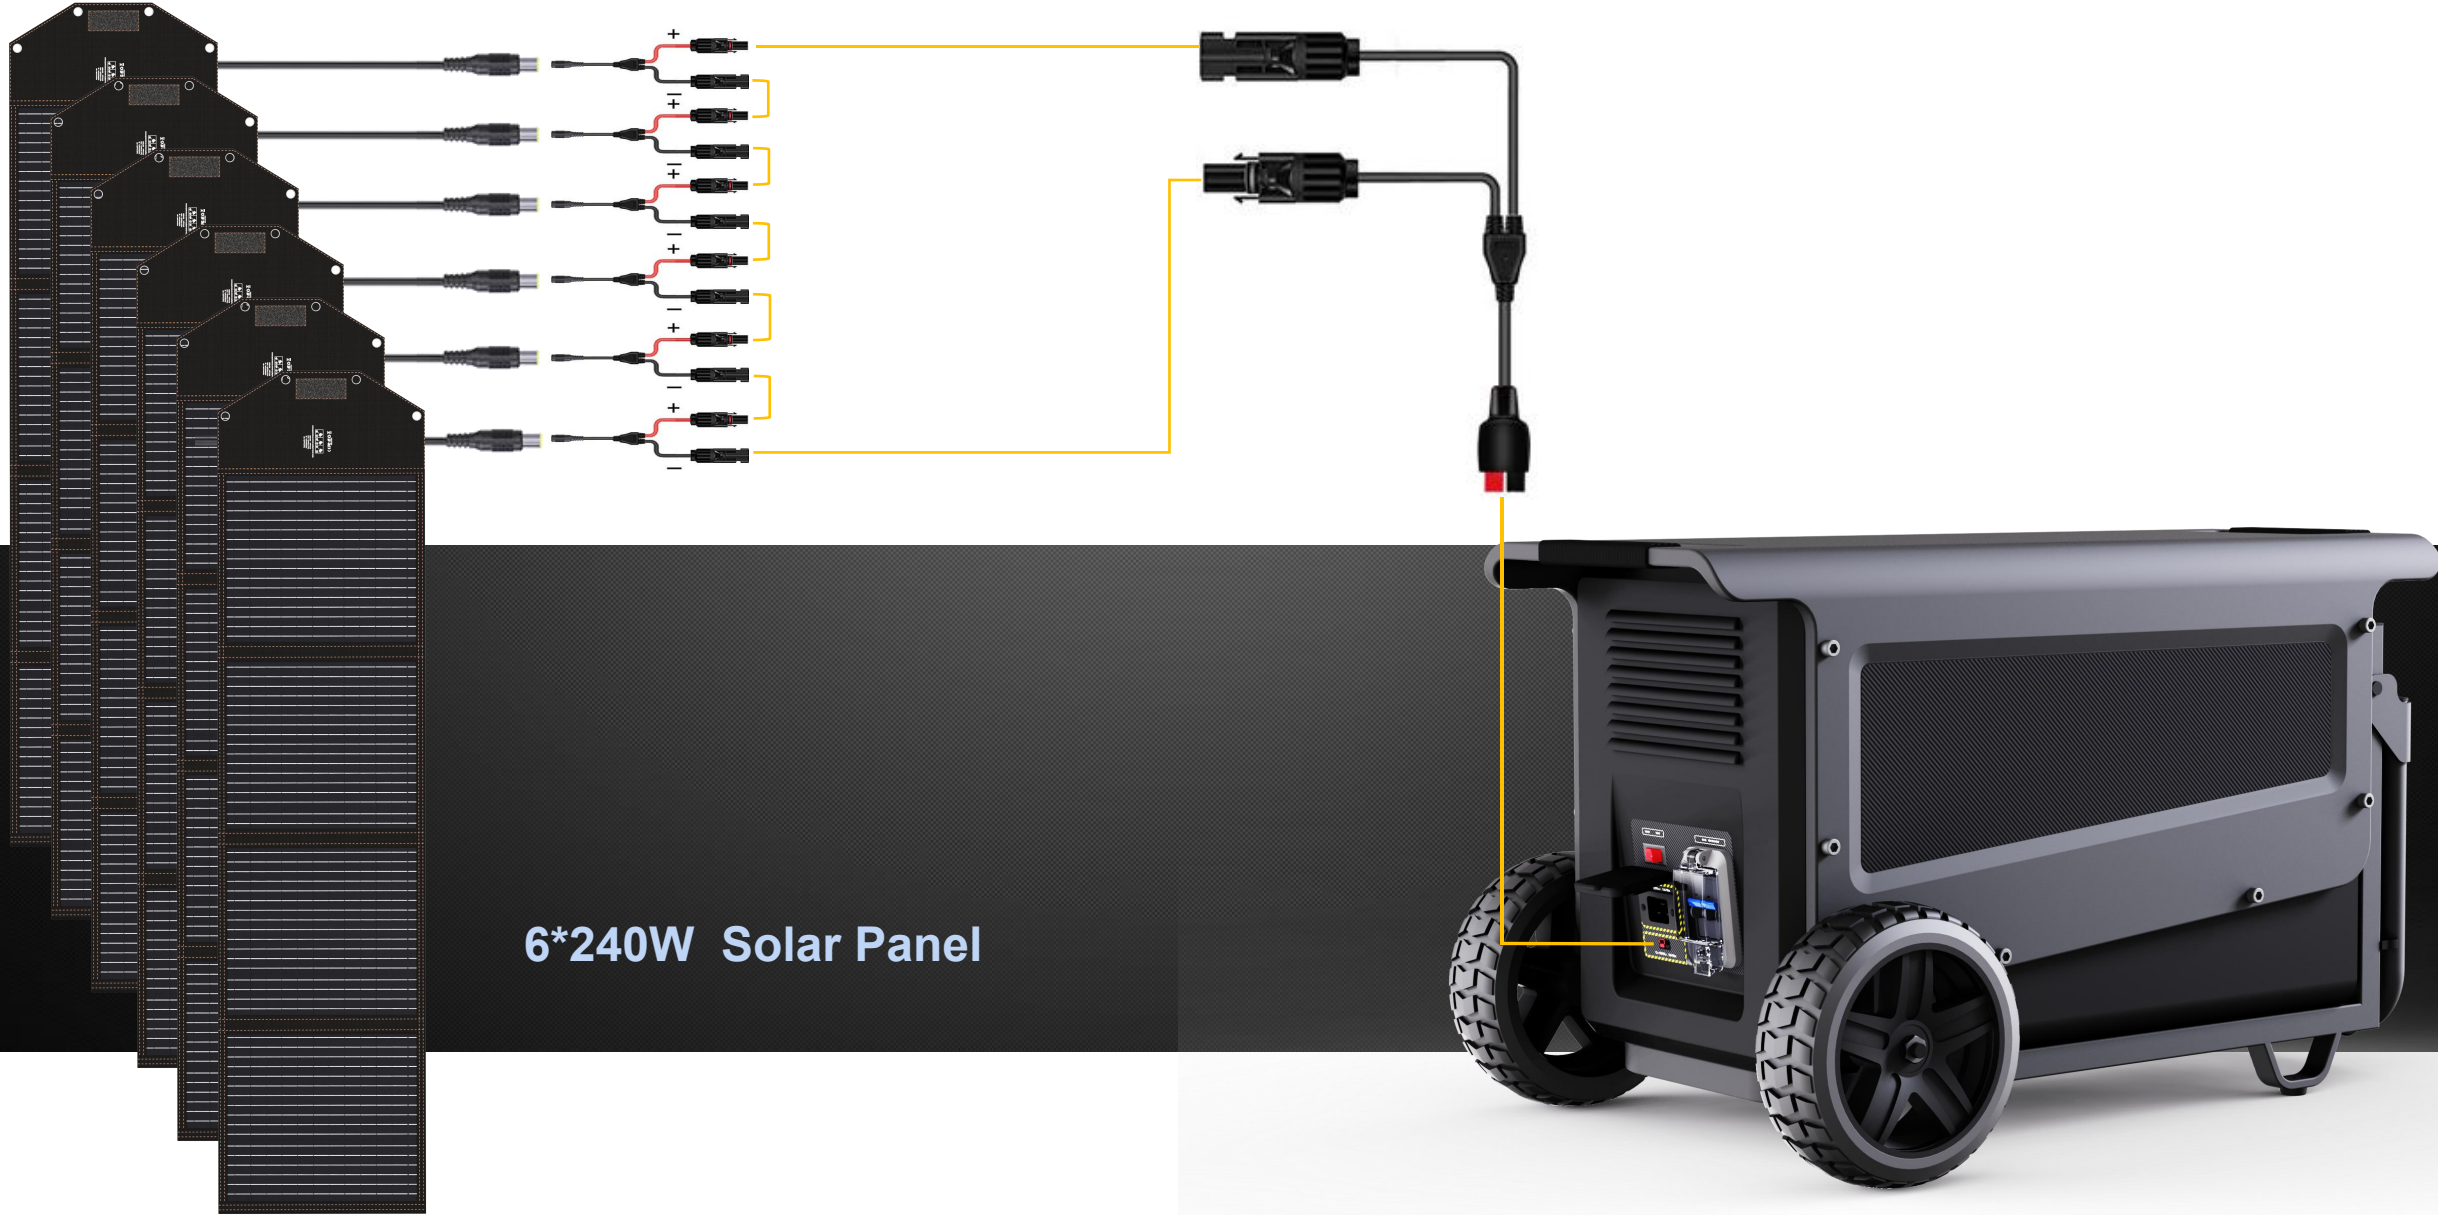

6*240W Solar Panel

Dynamic tracking of the maximum power of solar panel
Transfer efficiency is 15% higher than without MPPT

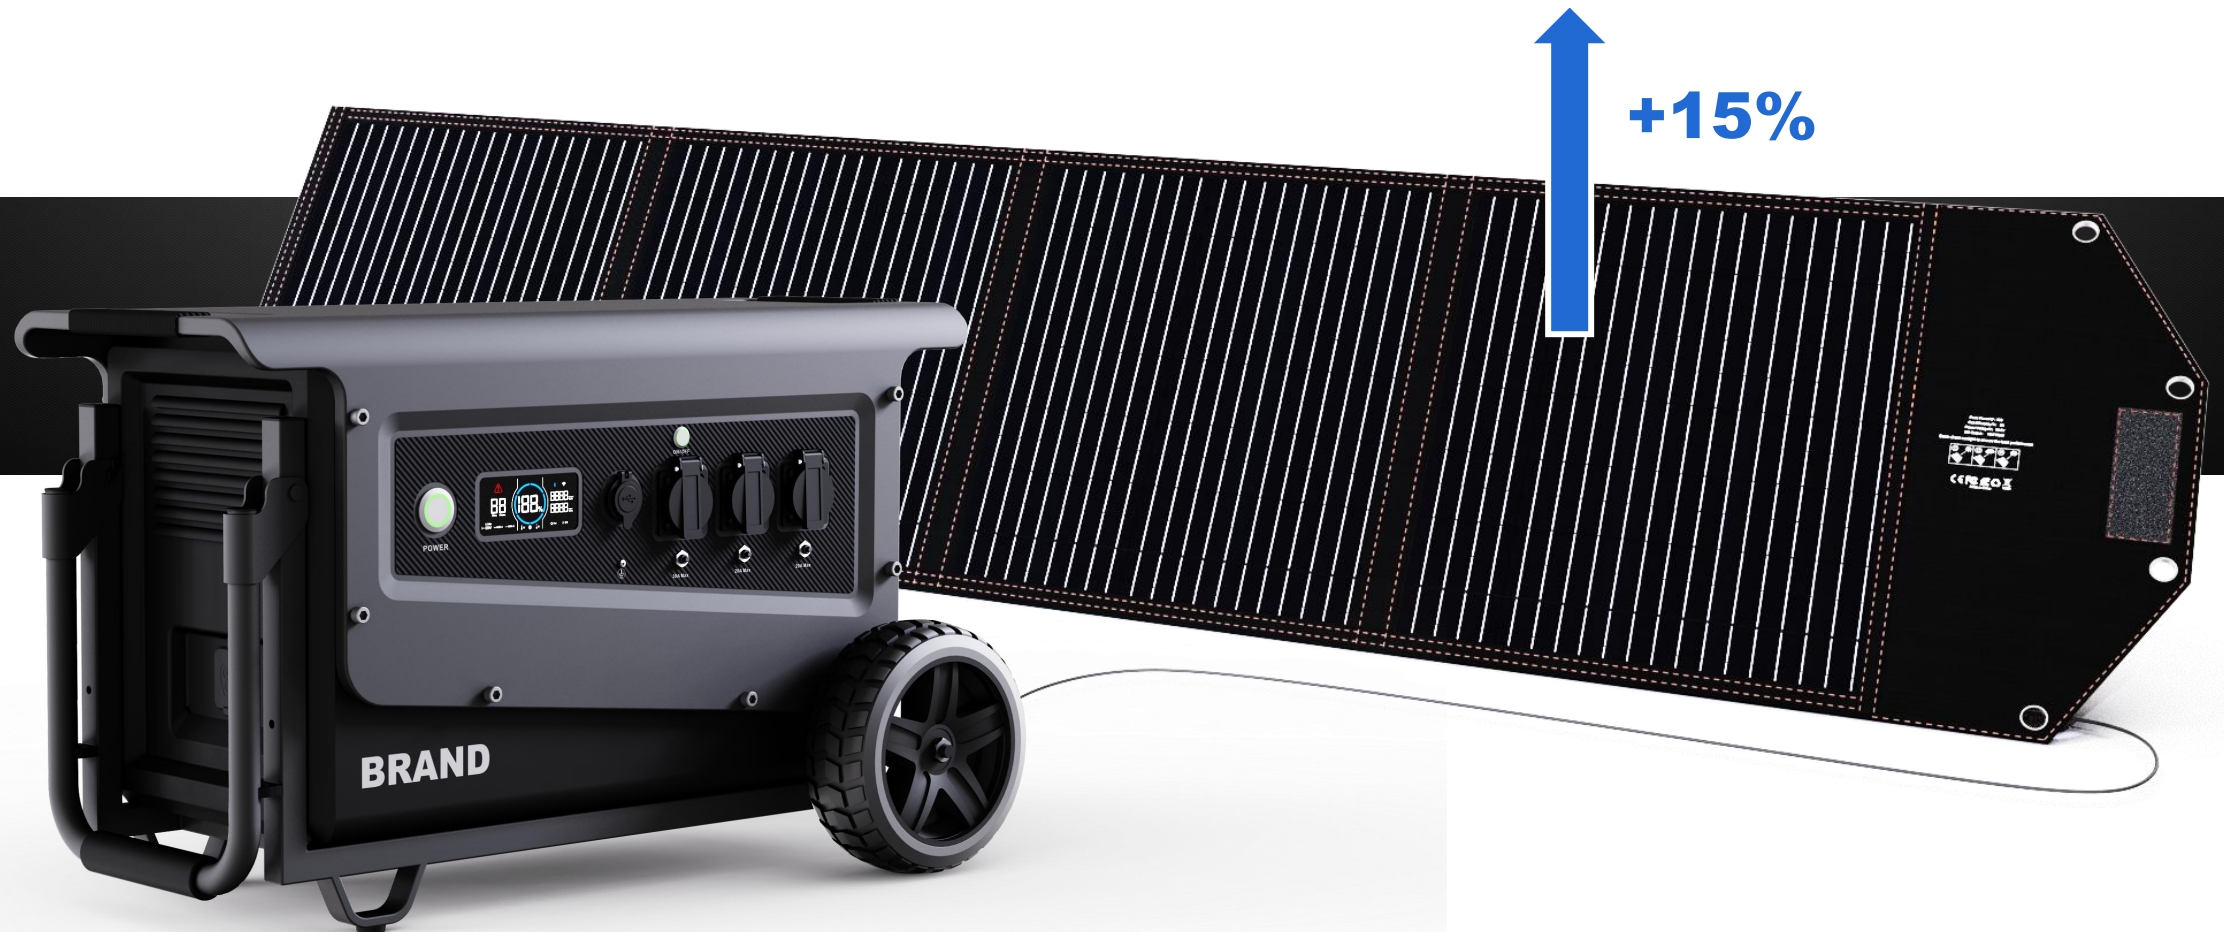

THANKS!